



ELECTRIC DRIVE SCISSOR LIFTS

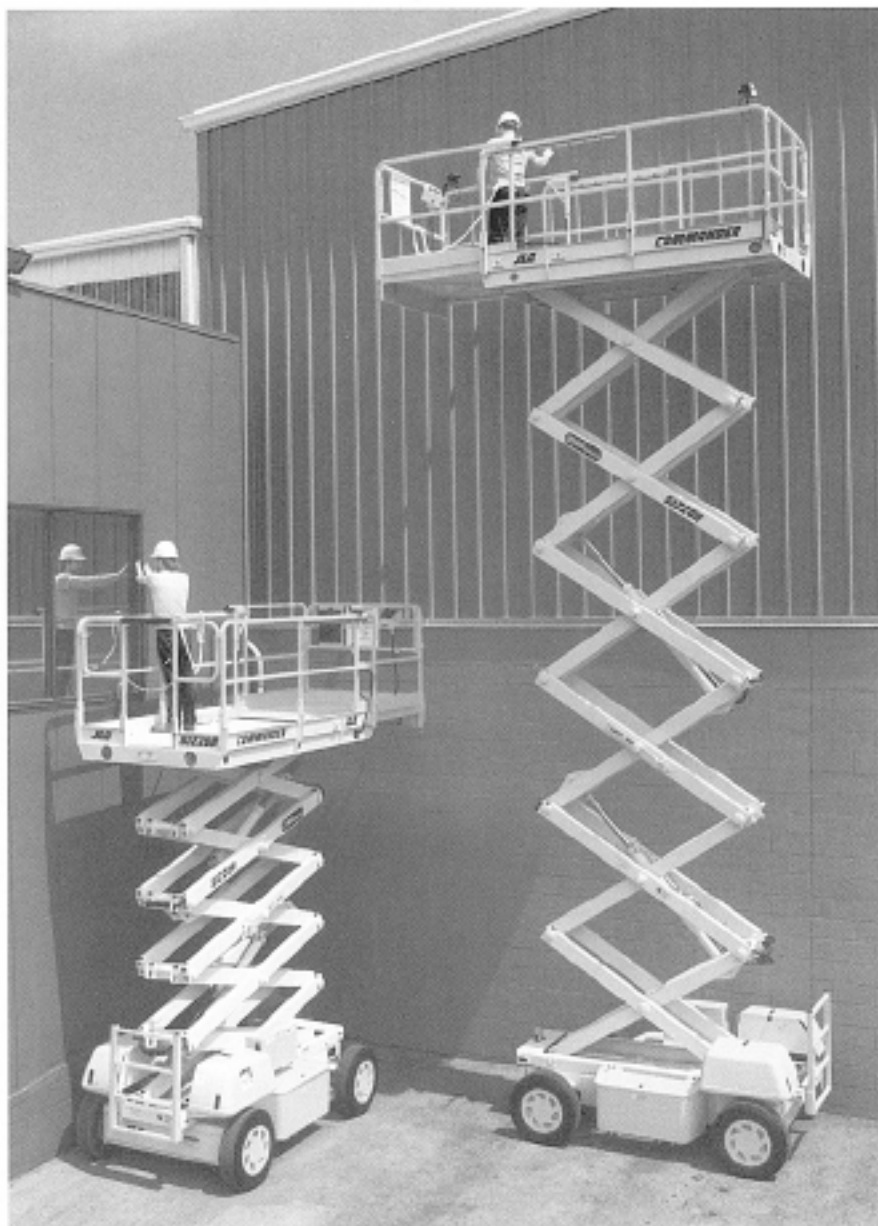



3369 electric
3969 electric

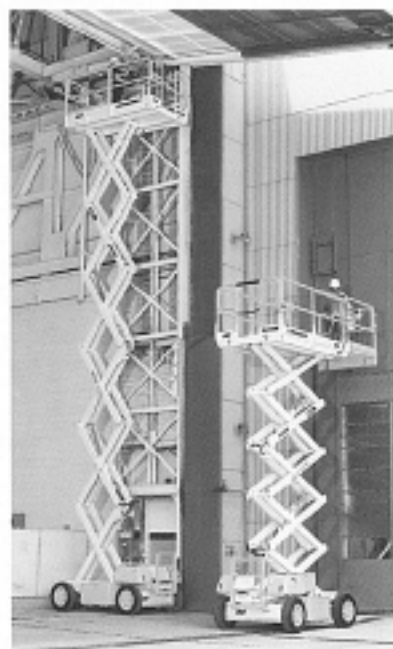

JLG®

3369 electric

For JLG Model 3369 machines manufactured between 1/1/00-12/31/00 see addendum on back side.

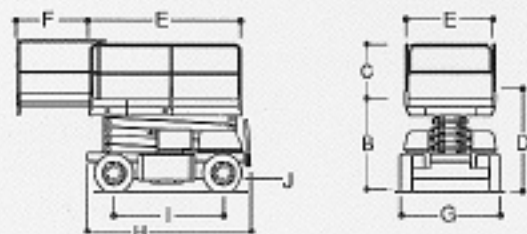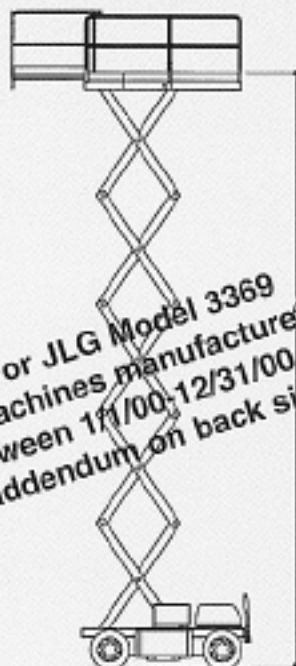

DIMENSIONAL DATA

A. Platform Height Elevated	33 ft. (10.06 m)
B. Platform Height Lowered	4 ft. 11 in. (1.49 m)
C. Railing Height	44 in. (1.12 m)
D. Overall Height (rails folded down)	6 ft. 1 in. (1.85 m)
E. Platform Dimensions	61 in. x 106 in. (1.55 m x 2.69 m)
F. Deck Extension	4 ft. (1.23 m)
G. Overall Width	69 in. (1.80 m)
H. Overall Length	9 ft. 1 in. (2.77 m)
I. Wheelbase	77 in. (1.98 m)
J. Ground Clearance	5 in. (125 mm)
Capacity	1,000 lbs. (454 kg)
Capacity on Deck Extension	500 lbs. (227 kg)
Lift/Lower Speeds	75 sec. up/60 sec. down
Maximum Drive Height	full height
4 Ft. (1.23 m) Front Deck Extension	standard
Platform Material	steel tread plate



CHASSIS

Drive Speed	3.0 mph (4.8 km/h)
Gradeability	25%
Turning Radius (inside)	5 ft. (1.52 m)
Turning Radius (outside)	12 ft. 5 in. (3.81 m)
Tire Size	205/75R 15
Tire Type	foam filled
Brakes	spring applied electrically released discs

POWER SYSTEM

Drive Motors	two series wound/fan cooled electric traction motors
Hydraulic Motor	series wound motor
Batteries	8 x 6V, 245 Amp. Hr.
Hydraulic Pump	single gear pump
Hydraulic Reservoir Capacity	13 gal. (49.2 L)
Manual Descent	lever activated hand pump
Gross Vehicle Weight	8,000 lbs. (3,630 kg)

3969 electric

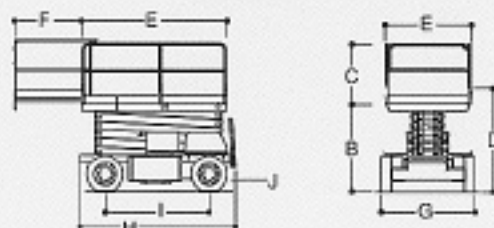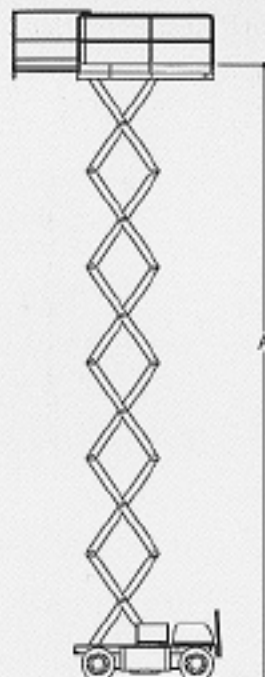

DIMENSIONAL DATA

A. Platform Height Elevated	39 ft. (11.90 m)
B. Platform Height Lowered	5 ft. 5 in. (1.67 m)
C. Railing Height	44 in. (1.12 m)
D. Overall Height (rails folded down)	6 ft. 7 in. (2.01 m)
E. Platform Dimensions	61 in. x 106 in. (1.55 m x 2.69 m)
F. Deck Extension	4 ft. (1.23 m)
G. Overall Width	69 in. (1.80 m)
H. Overall Length	9 ft. 1 in. (2.77 m)
I. Wheelbase	77 in. (1.98 m)
J. Ground Clearance	5 in. (125 mm)
Capacity	750 lbs. (340 kg)
Capacity on Deck Extension	500 lbs. (227 kg)
Lift/Lower Speed	75 sec. up/60 sec. down
Maximum Drive Height	32 ft. (9.75 m)
4 Ft. (1.23 m) Front Deck Extension	standard
Platform Material	steel tread plate

CHASSIS

Drive Speed	3.0 mph (4.8 km/h)
Gradeability	25%
Turning Radius (inside)	5 ft. (1.52 m)
Turning Radius (outside)	12 ft. 5 in. (3.81 m)
Tire Size	205/75R 15
Tire Type	foam filled
Brakes	spring applied electrically released discs

POWER SYSTEM

Drive Motors	two series wound/fan cooled electric traction motors
Hydraulic Motor	series wound motor
Batteries	8 x 6V, 245 Amp. Hr.
Hydraulic Pump	single gear pump
Hydraulic Reservoir Capacity	13 gal. (49.2 L)
Manual Descent	lever activated hand pump
Gross Vehicle Weight	8,800 lbs. (3,992 kg)

PERFORMANCE FEATURES

Standard Fold-Down Hand Rails

JLG's fold-down handrail system takes only minutes, utilizing lockpins, and can be stowed without the need for tools.



After entering the deck, simply disengage and fold the rear railing down to the deck . . .




The front rail is then disengaged and folded in, along the left siderail . . .



After front and rear railings are collapsed, main siderails can then be lowered . . .




After folding handrails down, machine height is reduced by 2 ft. 6 inches (.8m) and the unit can be driven using its moveable control box and 6 ft. (1.8m) umbilical cord, enabling travel through standard double doorways.

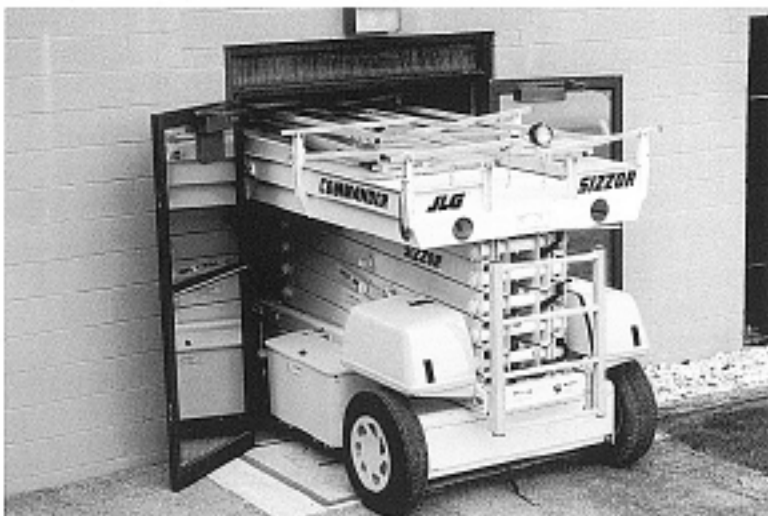


Travels Through Standard Double Doorway

With an overall width of 5 ft. 9 inches (1.75m), the 3369 and 3969 can pass through a standard double doorway. Following storage of standard fold-down handrails, overall height is reduced by 2 ft. 6 inches (.8m), which also allows for improved clearance when transporting by truck.

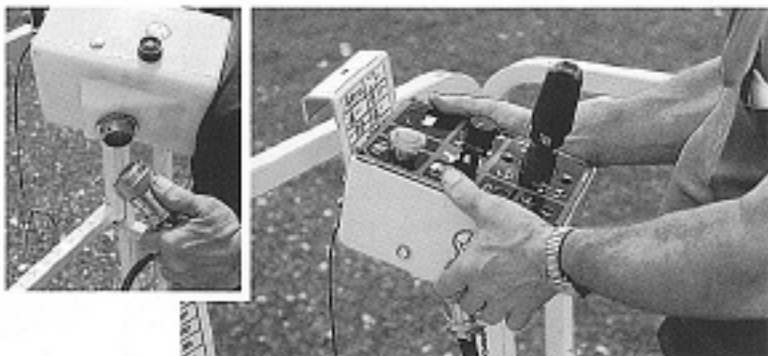

Moveable Platform Control Box

Platform controls are encased in a tough, polyethylene box, and feature easy-to-identify graphics. The control box, located on the front rail for travel, is moveable along the top handrails for increased worker productivity. It can also be removed via a quick disconnect coupling, for added security against unwanted use.

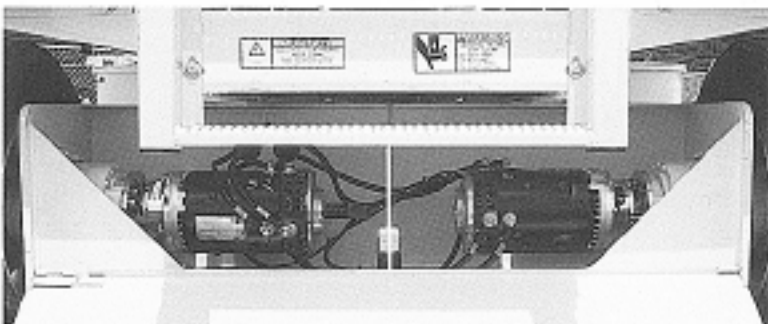

Efficient Electric Drive System

Highly efficient, direct electric drive is provided by dual traction motors via planetary reduction hubs. A solid-state motor controller provides proportional speed control with "ramp" on/off. Drive system components are neatly arranged in a separate compartment with a hinged cover for ease of service access.

PERFORMANCE FEATURES



25% Gradeability

Both models feature gradeability up to 25%, which allows for travel to or from worksites or when traversing in-plant ramps or uneven surfaces.




Ground Control Station With Hour Meter

Ground controls are housed within a recessed cutout for protection from possible damage, and include a main key selector switch, platform/ground selector, safety enable button and lift function switch. An hour meter is also included.



Electronic Calibrator For Monitoring Of Machine Settings

All machine functions can be calibrated at one convenient location, using the optional electronic calibrator. No need to manually adjust electrical settings. This tool provides an accurate means for monitoring machine settings.

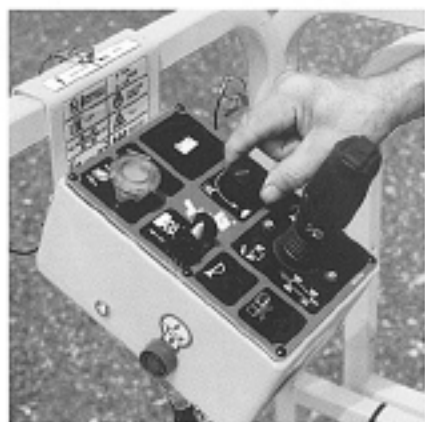

Variable Speed Control

A separate control provides variable speed control for lift and descend functions.

For JLG Model 3369 machines manufactured after 1/1/00 the Gross Vehicle Weight will increase to 9,350 lb. (4,241 kg)

The following have been made standard features:

- 370 amp Hr. batteries
- Decent alarm
- 5 degree tilt light and alarm
- Trigger Grip Joystick

STANDARD FEATURES

4 ft. (1.2 m) Roll Out Deck Extension, Fold Down Handrails, Fully Proportional Direct Electric Drive, Variable Lift Speed Control, Removeable Control Box, Foam Filled Tires, Eight 6V/245 Amp Hr. Batteries, Hourmeter, Manual Descent Pump

AVAILABLE OPTIONS

110V AC Wiring To Platform, Work Lights, Battery Discharge Indicator / LED Digital Hourmeter, Horn, Non-Marking Tires, Eight 6V/370 Amp Hr. Batteries, Extra Battery Boxes With Batteries And Cables, EE Rating, Wheel Covers, 5 Degree Tilt Indicator Light And Alarm, Travel Alarm, Descent Alarm, All Motion Alarm, Flashing Amber Beacon

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty.

We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years.

This warranty represents our commitment to superior quality and manufacturing standards and underscores our pledge of being "The Provider of Choice Worldwide - for Access and Material Handling Equipment."

Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.

This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 1926.451, (f) 29 CFR 1926.556, and ANSI/SIA A92.6 - 1990, as originally manufactured for intended applications.

JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Fax 717-485-6417

JLG®