Boom Lift





Upright POWERED ACCESS


AB46E/46RT self propelled boom specifications

	AB46E 2WD	AB46RT 4WD
max. working height	16.1m	16.1m
max. platform height	14.1m	14.1m
max. working outreach	7.5m	7.5m
jib length	1.5m	1.5m
jib arc	140°	140°
platform capacity (SWL)	227kg	227kg
platform size - outside	1.0m x 1.75m	1.0m x 1.75m
platform rotation	140°	140°
turret rotation	360° non-continuous	360° non-continuous
width A	1.75m	2.0m
stowed height B	2.0m	2.0m
stowed length c	5.43m	5.43m
gross weight	6,486kg	6,650kg
gradeability	17º/30%	22°/40%
inside turning radius	0.60m	0.60m
outside turning radius	3.0m	3.0m
tailswing - stowed	0	0
cycle time to full height	66 secs	66 secs
ground clearance	152mm	330mm
max. drive speed - stowed	5.64km/h	8.5km/h
max. drive speed - elevated	0.8km/h	0.6km/h
tyres	high grip poly filled	high grip poly filled
power source	8 6V 350 Ah batteries	Kubota V1505 Diesel

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

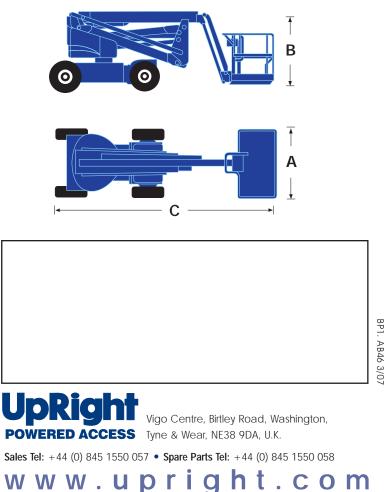

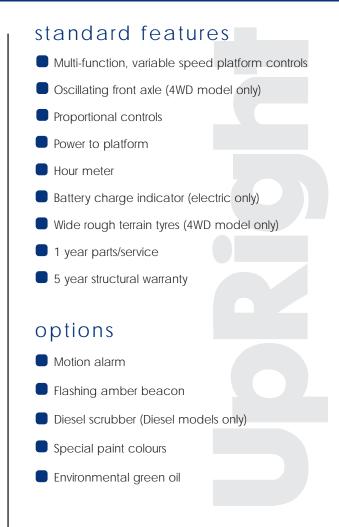

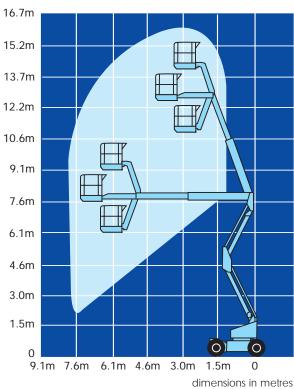

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

