



Junior Furniture Lift



The Böcker Junior Furniture Lift

The smallest furniture lift ever!

The Junior series of Böcker's Furniture Lifts is the compact alternative for efficient removals. These days, cities are often crowded and there is hardly any space for removal companies to set up their equipment. Many flats can only be reached through backyards or narrow lanes where standard-sized furniture lifts are completely oversized. The Böcker Junior Furniture Lift is the ideal solution to these obstacles. Designed to operate under challenging circumstances, it offers full performance at a minimum required space.



Advantages at a glance

- Minimum required space, also while machine is set up
- Fits through any kind of narrow line, even through the back entrance due to its retractable axle
- Retractable and removable ball shaped coupling for extremely narrow situations
- Can be pulled even by a standard passenger car
- Surpassing reliability and maximum ease of use like all Böcker Lifts
- With a payload of 250 kg



Full performance at a minimum required space

Further advantages in detail



Integrated rear lights



The Junior Furniture Lift can be pulled by any kind of passenger car

Technical Data

Model	HD 18/0-5 Non-brake assisted	HD 18/0-5 Brake assisted	HD 21/0-6 Brake assisted	HD 24/0-7 Brake assisted
Payload [kg]	250	250	250	250
Gross vehicle weight [kg]	750	1,200	1,200	1,200
Permissible axle load [kg]	750	1,200	1,200	1,200
Dimensions				
Total length: Retracted for manoeuvring [mm] Extended for transport [mm]	3,910 4,890	4,165 4,900	4,165 4,900	4,165 4,900
Total width: Retracted for manoeuvring [mm] Extended for transport [mm]	870 1,299 ²⁾	890 1,299 ²⁾	890 1,299 ²⁾	890 1,299 ²⁾
Guide rails: Length rail package [mm] Track width [mm]	3,855 540	3,855 540	3,910 540	3,965 540
extendable from-to [m]	3.85 – 17.7	3.85 – 17.7	3.9 – 20.8	3.95 – 23.5
Tow bar	Retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling
Drive unit	Hydraulic unit 230V, 2.6 kW or petrol engine ¹⁾	Hydraulic unit 230V, 2.6 kW or petrol engine ¹⁾	Hydraulic unit 230V, 2.6 kW or petrol engine ¹⁾	Hydraulic unit 230V, 2.6 kW or petrol engine ¹⁾

¹⁾ Special equipment

²⁾ 1,270 mm standard axle

All rights reserved for changes in dimension and construction.

Fits anytime and anywhere...







Standard axle (fixed) 1.3 m



Optional: retractable axle 0.89 m

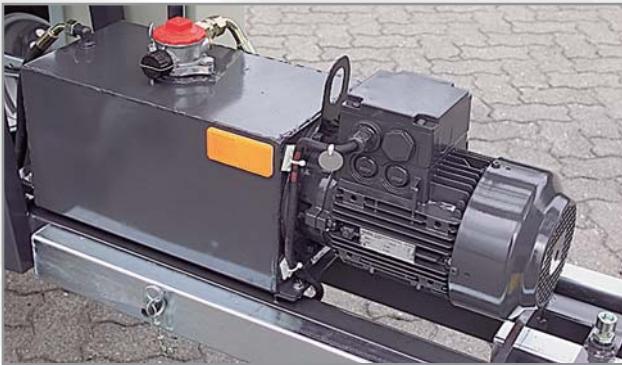

Standard: electric motor

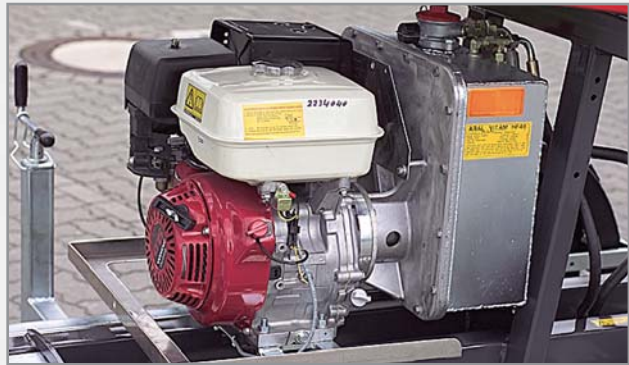

Optional: petrol engine




Optional: brake assisted support wheel



Multiple adjustable live ring



Retractable tow bar

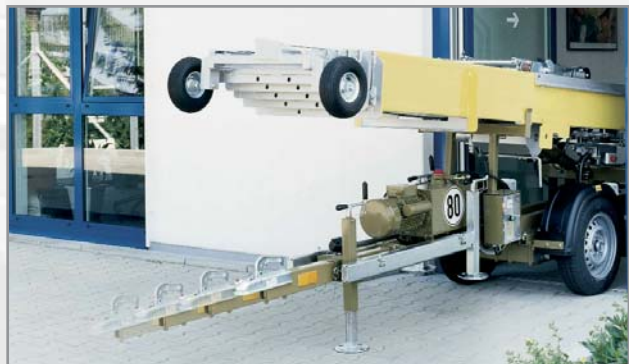

Fits even through a standard-sized door



Albert Böcker GmbH & Co. KG
Lippestraße 69 · D-59368 Werne
Fon +49 (0) 23 89/79 89-0
Fax +49 (0) 23 89/53 22 04
Mail boecker@boecker-group.com
Web www.boecker-group.com