

## Standard equipment

- 4WD hydrostatic transmission
- Negative parking brakes
- Mechanical wheel drive disengagement for emergency hauling
- Manual emergency lowering device
- Proportional controls
- Diagnostics
- Hour meter
- Cylinder holding valves
- Hydraulic deck extension 2 m
- Incliner with motion cut out and alarms
- Audible motion alarm
- Mechanical scissor protection
- Removable control box
- Oscillating rear axle
- Fold down railings
- Overload sensor
- CE – EN 280 marking
- Flashing beacons
- 220Volt cable with plug socket and security cut-out
- Automatic hydraulic levelling outriggers

## Standard equipment D

- Water-cooled Diesel engine 23 kW
- Start-up battery 24V 65 Ah
- Start-up battery alternator
- Rough terrain tyres extra grip 33x12 – 20"

## Standard equipment E

- Power pack 48V – 10 kW
- Traction battery 48V 630 Ah
- HF battery charger 48V – 55 A with automatic disengagement, Re-charging time 12-13 hours
- Battery control system with low voltage and safety cut-out
- Battery cut-out handle
- Non-marking rough terrain tyres extra grip 33x12 – 20"

## Optionals


- Non marking tyres (IT 17210 D)
- Black tyres (IT 17210 E)



IT 17210

## Benefits

- ✓ Compact dimensions 2,10 x 3,92m
- ✓ Traction up to 14m with full 540 kg capacity
- ✓ Machine for indoor/outdoor use, with a oscillating axle and four-wheel drive, for superior traction in rough terrain
- ✓ Automatic levelling outriggers for levelling the machine in rough terrain
- ✓ High manoeuvrability thanks to the turning radius of 0,8 m and the short overall length of the machine
- ✓ Works at maximum height within the allowed inclinations, without using the self-levelling outriggers
- ✓ Full capacity allowed on deck extension
- ✓ Sturdy construction and unique design

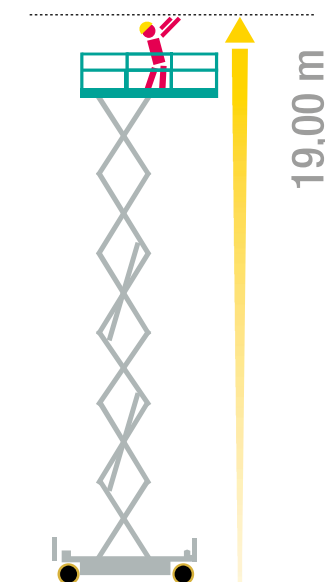



Automatic hydraulic levelling outriggers



Hydraulic deck extension 2 m

**IT 17210**

Number of scissors		6
A	mm	17000
B	mm	19000
C	mm	340
D	mm	3220
E	mm	2035
F	mm	2580
Max drive height	m	14.0
Facultative stabilizers use until max height		
Capacity (including 3 people)	kg	540
Diesel engine	kW	23
Electric motor	kW	10
Start-up battery	V/Ah	24 / 65
Traction battery	V/Ah	48 / 630
Start-up battery weight	kg	38
Traction battery weight	kg	960
Battery charger	V/A	48 / 55
Oil tank capacity	l	80
Max. speed	km/h	Diesel= 7 / battery= 4
Safety speed	km/h	Max. 0.6
Gradeability	%	45% Diesel / 30% battery
Max. Lateral inclination	degrees	1.5°
Max. Longitudinal inclination	degrees	3°
Internal turning radius	m	0.8
External turning radius	m	4.2
Tyre type		33x12-20"
Tyre dimensions	mm	815x295
Weight	kg	8900

