

# Telescopic Boom Lift

**UpRight**  
POWERED ACCESS




- 22.1m max. working height
- 17.1m max. outreach
- 1.8m, 90° jib
- 180° hydraulic powered platform rotation
- Driveable at full height
- Proportional control of drive, boom lift and slew
- 4 wheel drive

**SB66  
JRT**

# SB66JRT boom lift specifications

| SB66JRT                    |  |
|----------------------------|--|
| max. working height        | 22.1m  |
| max. platform height       | 20.1m  |
| max. outreach              | 17.1m  |
| platform capacity (SWL)    | 227kg  |
| platform size              | 0.76m x 1.52m  |
| platform rotation          | 180°   |
| jib length                 | 1.8m   |
| jib working arc            | 90°  |
| overall width              | 2.5m   |
| operational width          | 2.5m   |
| overall length <b>A</b>    | 10.1m  |
| lowered height <b>B</b>    | 2.7m   |
| min. transport length      | 10.1m  |
| gross weight               | 11,340kg   |
| inside turning radius      | 4.7m   |
| max. drive speed (lowered) | 4.8kmh   |
| ground clearance           | 330mm  |
| gradeability               | 65%  |
| tyres                      | 15 x 19.5 loader lug poly filled   |
| drive system               | 4 wheel drive  |
| controls                   | joystick proportional drive, lift and slew/<br>rheostat other boom functions |
| power source               | Deutz F4L-2011 air cooled diesel 64hp  |

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

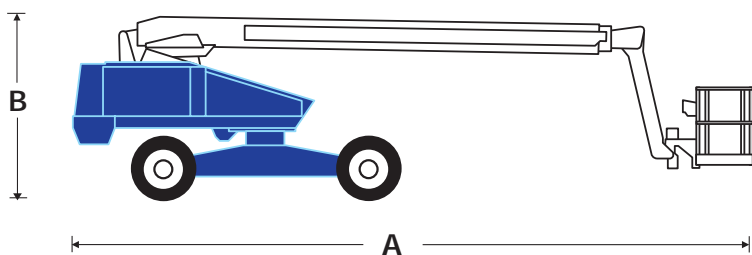

BP1: SB66JRT 8/07

**UpRight**  
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,  
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


[www.upright.com](http://www.upright.com)

## standard features

- 1.8m, 90° jib
- 180° hydraulic powered platform rotation
- 4 wheel drive
- Proportional control of drive, boom lift and slew
- Foam filled lug tyres
- Driveable at full height
- Operator horn
- Extra finger protection handrail
- 1 year parts and labour warranty
- 5 year structural warranty

## options

- Hydraulic generator
- Bumpguard system
- Platform control box cover
- Twin platform work lights
- Airline to platform
- Amber beacon on boom
- Swing gate in lieu of drop bar
- Sand blast protection kit
- Driving lights
- Cold weather start kit
- Drive motion alarm
- Towing package
- 2.44m x 0.76m aluminium platform 227kg SWL

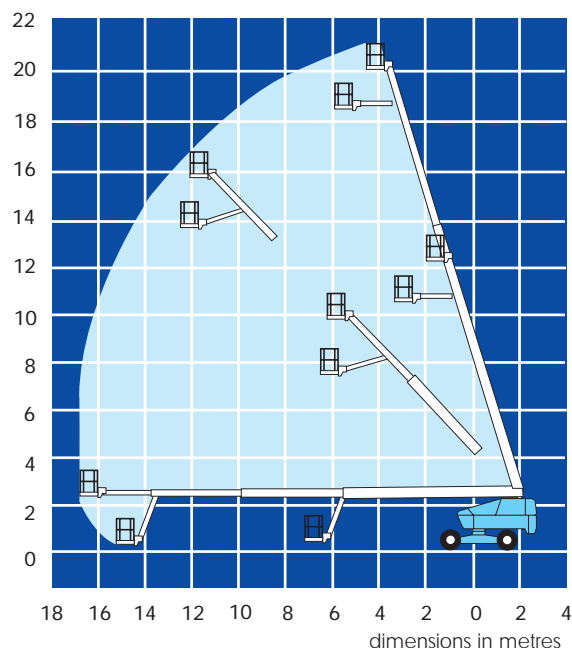

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

**UpRight**  
POWERED ACCESS