

Work and Fun with EVERUN!

ER1200F



Telescopic Wheel Loader



Rated Load
1000kg



Rated Power
25kW



Max. Dumping Height
2050mm



Overall Dimension(L*W*H)
5030*1570*2580mm



ER1200F | Telescopic Wheel Loader



Sturdy telescopic arm



Ergonomic joystick



Two bigger and stronger lift cylinder



Quick and easy tool change




Comfortable cabin and good circumferential visibility



Short hydraulic hose lengths



Everun articulated oscillating floating joint

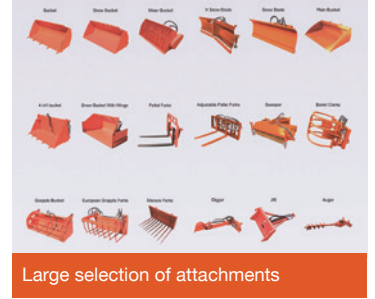

Large selection of attachments

Specifications:

▶ Engine Details

Model	CHANGCHAI ZN390Q
Type	Inline water cooled, four stroke
No. Of cylinder-bore/stroke	3—90×95mm
displacement	1.813 L
Rated power	25kW
Idle speed	850-900r/min
Rated speed	2400r/min
Maximum torque n.M @speed	109 @ 1680 r/min
Min fuel-consume ratio	≤265g/kW.h

▶ Drive Axles

Main reducing mode	Bevel gear grade I reduction
Wheel base	2190mm
Wheel tread	1200mm
Ground clearance	260mm

▶ Tyre

Type Specification	31*15.5-15
Front Tyre Pressure	310kPa
Rear Tyre Pressure	310kPa

▶ Brake System

Service Brake	Mechanical, drum brake
Parking Brake	Manual disk brake

▶ Performance Parameters

Rated loading	1000kg
Max. loading	1200kg
Overall weight	3340kg
Rated bucket capacity	0.38cbm
Max. tractive force	18kN
Max. breakout force	20kN
Max. grade ability	20°
Max. dump height	2050mm
Max. dump reach	1075mm
Max dump height	2675mm
Max. dump reach	1510mm
Overall dimension (L×W×H)	5030*1570*2580mm
Min. turning radius(outside of wheels)	3905mm
Max. steering angle	38°
Oscillation angle	8°

▶ Hydraulic System

System working pressure	20MPa
Boom lifting time	3s
Total time	7.4s
Fuel tank capacity	70L
Function of leveling automatically	yes