

QINGDAO EVERUN MACHINERY CO., LTD.



EXCAVATOR ERE12PRO



1200kg
Operating Weight



0.023cbm/120kg
Digging Bucket Capacity



Kubota D722-E4B-ZFM-1
Euro5/EPA4 Engine (10.2kW)



3127x950x2195mm
Overall Dimension



- With 120° deflection boom, 30° left & 90° right.


- The appearance is designed by the Italian designer.

- Increase air outlet, improve the heat dissipation capacity.

- Optional extension track.

- The LED working light could give operator the best view

- Using S355 steel material which is good steel plate strength.

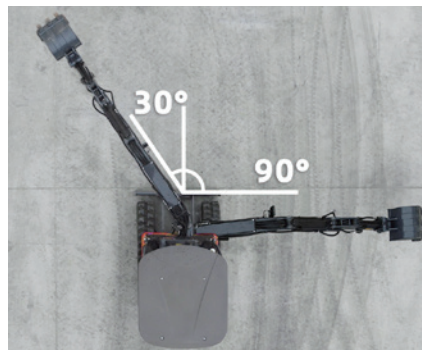

EXCAVATOR

ERE12PRO



SPECIFICATION:

Model	ERE12 Pro
Operating Weight	1200kg
Digging bucket capacity	0.023cbm/120kg
Digging bucket width	350mm
Engine	Kubota D722-E4B-ZFM-1
Rated power	10.2kW
Displacement	0.719L
Bore stroke	3 cylinder, water cooled
Main pump	ZANEDA
Pump flow	18L/min
Valve	BEIFANG
Swing motor	Hydro Man(ZMP-1-200)
Traveling motor	EATON 612-4173-1

MAIN DEMENSIONS

Overall Dimensions (LxWxH)	3127x950x2195mm
Wheelbase	920 mm
Total length of track	1220mm
Platform ground clearance	380 mm
Platform back turning radius	810mm
Chassis width	870mm
Track width	180mm
Chassis ground clearance	94.5mm
Bucket digging force	9.7kN
Arm digging force	8.6kN
Rubber track height	310mm

OPERATING RANGE

Max. Digging depth	1735mm
Max. Vertical digging depth	1581mm
Max. Digging height	3006mm
Max. Dumping height	2248mm
Max. Digging radius on ground	3224mm
Min. Rotation radius	1430mm
Max. Upgrade height of bulldozer blade	200mm
Max. Digging depth of bulldozer blade	200mm
Boom deflection angle (left)	30°
Boom deflection angle (right)	90°

